

SPX Series




- 5mmL, 85°C, 1000 hours assured non-polarized

- SPECIFICATIONS

Items	Characteristics						
Category	-40 to +85°C						
Temperature Range							
Rated Voltage Range	6.3 to 50Vdc						
Capacitance Tolerance	± 20% (M)						
Leakage Current	$I = 0.05CV + 10\mu A$, whichever is greater. Where, I : Max. Leakage current (μA). C: Nominal capacitance (μF). V : Rated voltage(V) (at 20°C , after 2 minutes)						
Dissipation Factor ($\tan \delta$)	Rated voltage (Vdc)	6.3V	10V	16V	25V	35V	50V
	$\tan \delta$ (Max.)	0.25	0.20	0.17	0.17	0.15	0.13
	(at 20°C , 120Hz)						
Low Temperature Characteristics	Impedance ration max at 120Hz						
	Working voltage	6.3v	10v	16v	25v	35v	50v
	Z-25°C/ Z+20°C	4	3	2	2	2	2
	Z-40°C/ Z+20°C	10	8	6	4	3	3
Load. Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the voltage is applied for 1000 hours at 85°C						
	Capacitance change	$\leq \pm 25\%$ of the initial value					
	DF ($\tan \delta$)	$\leq 200\%$ of the initial specified value					
	Leakage current	\leq The initial specified value					
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 85°C without voltage applied.						
	Capacitance change	$\leq \pm 25\%$ of the initial value					
	DF ($\tan \delta$)	$\leq 200\%$ of the initial specified value					
	Leakage current	\leq The initial specified value					
Ripple Current Multiplier	Temperature coefficient						
	Temperature(°C)	~55	60	70	85		
	Factor	1.65	1.50	1.30	1.00		
	Frequency coefficient						
	cap \ freq	50	120	300	1k	10k~	
	~33	0.75	1.00	1.15	1.34	1.50	
	47up	0.80	1.00	1.08	1.20	1.30	

- Diagram: (Unit: mm)

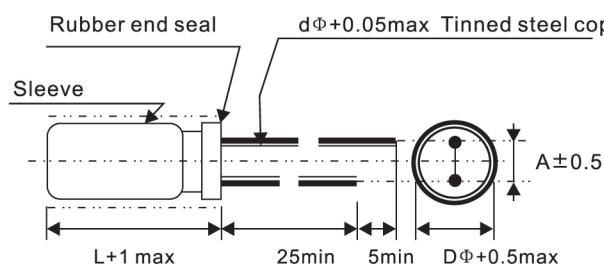

Body Dia ΦD	4	5	6
Lead Dia Φd	0.45	0.50	0.50
Lead Space A	1.5	2.0	2.5

◆ SPX series 5mmL, 85°C Non polar 無極性

● STANDARD RATING

μF	Vdc	6.3	10	16	25	35	50
0.1							4*5 1.9
0.22							4*5 2.9
0.33							4*5 3.5
0.47							4*5 4.2
1.0						4*5 5.5	4*5 6.1
2.2					4*5 8	4*5 9.1	5*5 10
3.3				4*5 9	4*5 10	5*5 12	5*5 13
4.7			4*5 11	5*5 12	5*5 14	5*5 15	6.3*5 16
10	4*5	15	5*5 19	6.3*5 21	6.3*5 22	6.3*5 24	
22	5*5	26	6.3*5 31	6.3*5 33			
33	6.3*5	36	6.3*5 38				
47	6.3*5	41					

Case size $\Phi D \times L$ (mm)
Rated ripple current (mA rms) at 85°C, 120Hz

Ripple Current : mA/rms at 120Hz 85°C

Chip Type SMD	Miniature Type	General Purpose	High Frequency Low Impedance	High Voltage High Reliability	Non-polar Type	Large Size Snap-in	Large Size Screw	X Metallized Polypropylene Fine Capacitors