

SNX Series




- 85°C, 7mmL, height, Non polar, Suitable for use in circuits whose polarity is reversed

- SPECIFICATIONS

Items	Characteristics																																							
Category	-40 to +85°C																																							
Temperature Range																																								
Rated Voltage Range	6.3 to 50Vdc																																							
Capacitance Tolerance	± 20% (M) (at 20°C ,120Hz)																																							
Leakage Current	$I=0.05CV + 10 \mu A$, whichever is greater. Where, I :Max. Leakage current (μA). C: Nominal capacitance (μF). V:Rated voltage(V) (at 20°C , after 2 minutes)																																							
Dissipation Factor (tan δ)	Rated voltage (Vdc)	6.3V	10V	16V	25V	35V	50V																																	
	tan δ (Max.)	0.24	0.20	0.16	0.16	0.14	0.12																																	
	(at 20°C ,120Hz)																																							
Low Temperature Characteristics	Impedance ration max at 120Hz <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Working voltage</td> <td>6.3v</td> <td>10v</td> <td>16v</td> <td>25v</td> <td>35v</td> <td>50v</td> </tr> <tr> <td>Z-25°C/ Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/ Z+20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table>							Working voltage	6.3v	10v	16v	25v	35v	50v	Z-25°C/ Z+20°C	4	3	2	2	2	2	Z-40°C/ Z+20°C	8	6	4	4	3	3												
Working voltage	6.3v	10v	16v	25v	35v	50v																																		
Z-25°C/ Z+20°C	4	3	2	2	2	2																																		
Z-40°C/ Z+20°C	8	6	4	4	3	3																																		
Load. Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the voltage is applied for 1000 hours at 85°C <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Capacitance change</td> <td colspan="6">$\leq \pm 20\%$ of the initial value</td> </tr> <tr> <td>DF (tan δ)</td> <td colspan="6">$\leq 200\%$ of the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td colspan="6">\leqThe initial specified value</td> </tr> </table>							Capacitance change	$\leq \pm 20\%$ of the initial value						DF (tan δ)	$\leq 200\%$ of the initial specified value						Leakage current	\leq The initial specified value																	
Capacitance change	$\leq \pm 20\%$ of the initial value																																							
DF (tan δ)	$\leq 200\%$ of the initial specified value																																							
Leakage current	\leq The initial specified value																																							
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours at 85°C without voltage applied. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Capacitance change</td> <td colspan="6">$\leq \pm 20\%$ of the initial value</td> </tr> <tr> <td>DF (tan δ)</td> <td colspan="6">$\leq 200\%$ of the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td colspan="6">\leqThe initial specified value</td> </tr> </table>							Capacitance change	$\leq \pm 20\%$ of the initial value						DF (tan δ)	$\leq 200\%$ of the initial specified value						Leakage current	\leq The initial specified value																	
Capacitance change	$\leq \pm 20\%$ of the initial value																																							
DF (tan δ)	$\leq 200\%$ of the initial specified value																																							
Leakage current	\leq The initial specified value																																							
Ripple Current Multiplier	Temperature coefficient <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Temperature(°C)</td> <td>~ 55</td> <td>60</td> <td>70</td> <td>85</td> <td></td> </tr> <tr> <td>Factor</td> <td>1.65</td> <td>1.50</td> <td>1.30</td> <td>1.00</td> <td></td> </tr> </table> Frequency coefficient <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>cap</td> <td>freq</td> <td>50</td> <td>120</td> <td>300</td> <td>1k</td> <td>10k~</td> </tr> <tr> <td>~47</td> <td></td> <td>0.75</td> <td>1.00</td> <td>1.35</td> <td>1.57</td> <td>2.00</td> </tr> <tr> <td>100~470</td> <td></td> <td>0.80</td> <td>1.00</td> <td>1.23</td> <td>1.34</td> <td>1.50</td> </tr> </table>							Temperature(°C)	~ 55	60	70	85		Factor	1.65	1.50	1.30	1.00		cap	freq	50	120	300	1k	10k~	~47		0.75	1.00	1.35	1.57	2.00	100~470		0.80	1.00	1.23	1.34	1.50
Temperature(°C)	~ 55	60	70	85																																				
Factor	1.65	1.50	1.30	1.00																																				
cap	freq	50	120	300	1k	10k~																																		
~47		0.75	1.00	1.35	1.57	2.00																																		
100~470		0.80	1.00	1.23	1.34	1.50																																		

- Diagram: (Unit: mm)

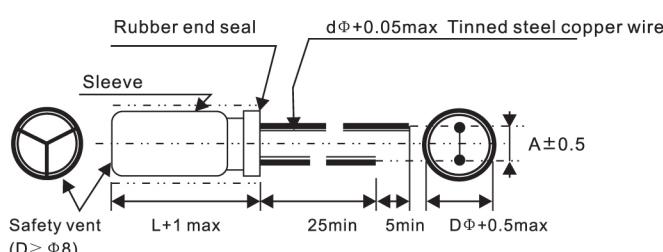

Body Dia ΦD	4	5	6	8
Lead Dia Φd	0.45	0.50	0.50	0.50
Lead Space A	1.5	2.0	2.5	3.5

◆ SNX series 7mm, 85°C 無極性產品

● STANDARD RATING

μF	Vdc	6.3	10	16	25	35	50					
0.1								4*7	1.0			
0.22								4*7	2.3			
0.33								4*7	3.5			
0.47								4*7	5.0			
1.0								4*7	10			
2.2								4*7	14			
3.3								4*7	16	5*7	20	
4.7				4*7	18	5*7	21	5*7	22	6.3*7	27	
10			4*7	24	5*7	30	6.3*7	35	6.3*7	37	8*7	44
22			5*7	40	6.3*7	51	6.3*7	53	8*7	63	8*7	65
33	5*7	42	6.3*7	56	6.3*7	63	8*7	74	8*7	78		
47	6.3*7	58	6.3*7	67	6.3*7	75						
100	8*7	95	8*7	110	8*7	125						

Ripple Current : mA/rms at 120Hz 85°C

Chip Type SMD	Miniature Type	General Purpose	High Frequency Low Impedance	High Voltage High Reliability	Non-polar Type	Large Size Snap-in	Large Size Screw	X Metallized Polypropylene Fine Capacitors